


Plastifloor® 418 trowel on coating with Membrane (R 10), dry areas

Fast and seamless installation from wall to wall including coves, many different colors or lining available, 2 h after installation fully loadable.

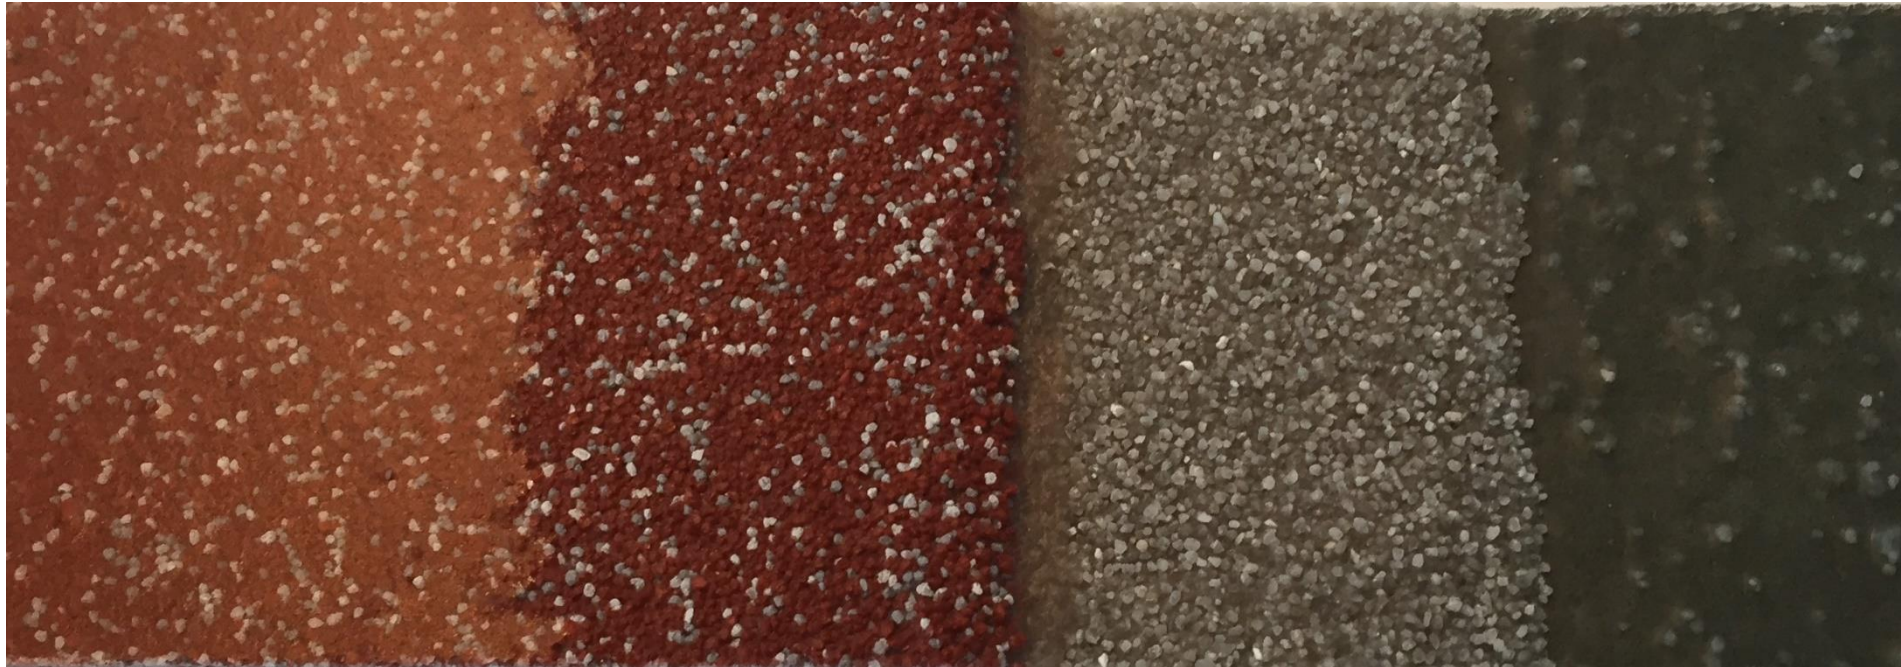

Sealer

Plastifloor® 522

~120 ft²/gal.

clear

Coating

Plastifloor® 418

~15 ft²/gal.

1:3 mix with color quartz

~1.5 lbs./ft²

Membrane

Plastifloor® 332

~30 ft²/gal.

1:1.5 with s/l filler

broadcast with

Quartz mesh 16-30

Primer

Plastifloor® 112/118

~100 ft²/gal.

slightly broadcast

Quartz mesh 16-30